

## Trailers and Hitches (Note: Trailers are shipped unassembled.)



### 4 West Four-Wheel Steerable Off-Road Trailer #042 801

A heavy-duty 1166-kg (2570 lb.) capacity trailer designed for use in mines, quarries, and other rough terrain. Has narrow 6.7-m (22 ft.) turning radius. Includes 76-mm (3 in.) lunette eye, universal hitch and safety chains.



### HWY-224 Trailer

#043 805 For highway use.

### OFR-224 Trailer

#043 802 For off-road use.

A 1202-kg (2650 lb.) capacity trailer. Welded steel tubing frame, heavy-duty axle with roller bearing hubs and leaf-spring suspension. Includes jack stand and 50-mm (2 in.) ball hitch. *HWY-224 also includes fenders and lights.*

### Cable Tree #043 826

Provides an area to conveniently wrap weld cables and extension cords.



### Dual Hitch #300 831


50-mm (2 in.) ball hitch and 76-mm (3 in.) lunette eye in one reversible assembly.

## Trailer Specifications (Subject to change without notice.)

Model	Gross Axle Weight Rating	Gross Vehicle Weight Rating	Net Payload	Height of Bed	Road Clearance	Track (Center to center of tires)	Standard Tires (Standard rating or P-size rating)	Dimensions	Net Weight
4 West	907 kg/axle (2000 lb./axle)	1361 kg (3000 lb.)	1166 kg (2570 lb.)	540 mm (21.25 in.)	203 mm (8 in.)	1403 mm (55.25 in.)	B78-13	Length: 2311 mm (91 in.)* Width: 1556 mm (61.25 in.)	195 kg (430 lb.)
HWY-224 OFR-224	1588 kg (3500 lb.)	1343 kg (2960 lb.)	1202 kg (2650 lb.)	470 mm (18.5 in.)	184 mm (7.25 in.)	1321 mm (52 in.)	B78-13	Length: 2667 mm (105 in.) Width: HWY-1511 mm (59.5 in.)** OFR-1484 mm (58.437 in.)	145 kg (320 lb.)

\*Does not include tongue. \*\*Width at outside of fenders.

## Mounting Specifications

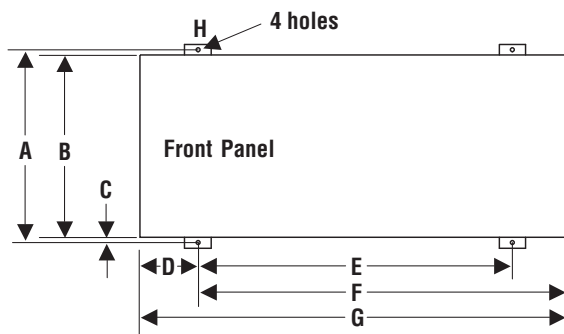

A. 757 mm (29.812 in.)

B. 699 mm (27.5 in.)

C. 25 mm (1 in.)

D. 244 mm (9.625 in.)\*

E. 1181 mm (46.5 in.)\*

F. 1422 mm (56 in.)\*

G. 1654 mm (65.125 in.)

H. 14 mm (.562 in.) diameter

\*With mounting brackets in center position. Dimensions vary with location of mounting brackets.

**Height:** 1270 mm (50 in.)

(to top of exhaust)

**Width:** 724 mm (28.5 in.)

(mounting brackets turned in)

781 mm (30.75 in.)

(mounting brackets turned out)

**Depth:** 1654 mm (65.125 in.)