



FORM MT200

Creek Corrector

### CREATE, REPAIR & CUSTOMIZE

- High-performance dual voltage inverter for 115V and 220V
- Two dynamic welding modes: GTAW (TIG) and SMAW (Stick)
- Easy-to-use interface allows for quick setting adjustments
- Compact, portable design for use in multiple applications

## QUALITY

VERSATILITY

### PERFORMANCE

#### **COMPLETE SYSTEM INCLUDES:**

MT200-AC/DC Welding Machine CK17 Flex-Head Gas-Cooled TIG Torch Super-Flex<sup>™</sup> Cables with Dinse Connector AK-3 Accessory/Consumable Kit Ground Clamp Single-Flow Regulator Power Adapter

"As a welder of critical aircraft hardware, this machine is extremely easy to use and runs as smooth as our more expensive machines at work." – R. Harper, AIRCRAFT WELDER, 38 YEARS EXPERIENCE

MT200-AC/DC



www.CKWORLDWIDE.com





### **POWER & PERFORMANCE IN** A COMPACT DESIGN

The MT200-AC/DC is the answer to both creativity and production driven TIG welding. This innovative TIG welding machine provides the ability to guickly and efficiently adapt to dynamic welding situations, while maintaining the same quality of experience you have come to expect from CK Worldwide.

Its compact portable design allows you to easily tackle any project from fabrication and education to aerospace and nuclear applications. Whether you TIG weld for enjoyment or as a career you will find that the MT200 can help you accomplish your toughest welding challenges.

With background testing performed by production welders and the best TIG welding professionals in the industry the MT200 delivers precision welding in a conveniently packaged system.

#### COMPLETE WELDING SYSTEM INCLUDES:

- MT200-AC/DC •
- CK17 Flex-Head Torch with 12.5' (3.8m) . Super-Flex<sup>™</sup> Cables CK17-12-RSF FX
- Dinse Connector SL2-35MT
- AK-3 Accessories/Consumables Kit AK-3
- Ground Clamp with 12.5' (3.8m) Cable
- Foot Pedal Amperage Control
- Single Flow Regulator •
- 6' (1.8 m) Gas Hose ARH-6
- 220V to 115V Power Adapter •

ACCESSORIES / CONSUMABLES AK-3

150 amp ACHF or DCSP @ 100% Gas-Cooled Length: 8-3/4" (22.2cm)

**CKI7 FLEX-HEAD TORCH** 

CK-17-12-RSF FX



Weight: 5 oz. (141gm)







FOOT PEDAL


AMPERAGE

CONTROL

**DINSE CONNECTOR SL2-35MT** 





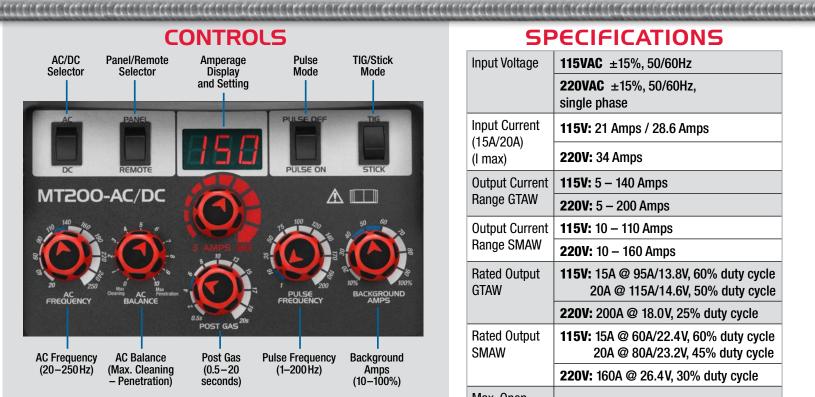

Advanced technology with an easy-to-use interface, perfect for all welders, from the novice to the master craftsman



#### SPECIFICATIONS

Input Voltage	<b>115VAC</b> ±15%, 50/60Hz
	<b>220VAC</b> ±15%, 50/60Hz, single phase
Input Current (15A/20A) (I max)	<b>115V:</b> 21 Amps / 28.6 Amps
	<b>220V:</b> 34 Amps
Output Current Range GTAW	<b>115V:</b> 5 – 140 Amps
	<b>220V:</b> 5 – 200 Amps
Output Current Range SMAW	<b>115V:</b> 10 – 110 Amps
	<b>220V:</b> 10 – 160 Amps
Rated Output GTAW	<b>115V:</b> 15A @ 95A/13.8V, 60% duty cycle 20A @ 115A/14.6V, 50% duty cycle
	<b>220V:</b> 200A @ 18.0V, 25% duty cycle
Rated Output SMAW	<b>115V:</b> 15A @ 60A/22.4V, 60% duty cycle 20A @ 80A/23.2V, 45% duty cycle
	<b>220V:</b> 160A @ 26.4V, 30% duty cycle
Max. Open Circuit Volts	61 volts
Gas Pre-flow	0.5 seconds
Gas Post-flow	0.5 – 20 seconds
AC Frequency	20 – 250 Hz
Pulse Frequency	1 – 200 Hz
	1 – 200 Hz 50%
Frequency	
Frequency Pulse Width	50%
Frequency Pulse Width Base Current	50% 10 - 100%
Frequency Pulse Width Base Current Arc Start	50% 10 – 100% High Frequency
Frequency Pulse Width Base Current Arc Start	50% 10 – 100% High Frequency Height: 15 in. (381mm)


www.CKWORLDWIDE.com





# Use the MT200-AC/DC to weld:

- Aluminum
- Titanium
- Magnesium
- Stainless Steel
- Low Alloy Steel
- Deoxidized Copper
- And much more!

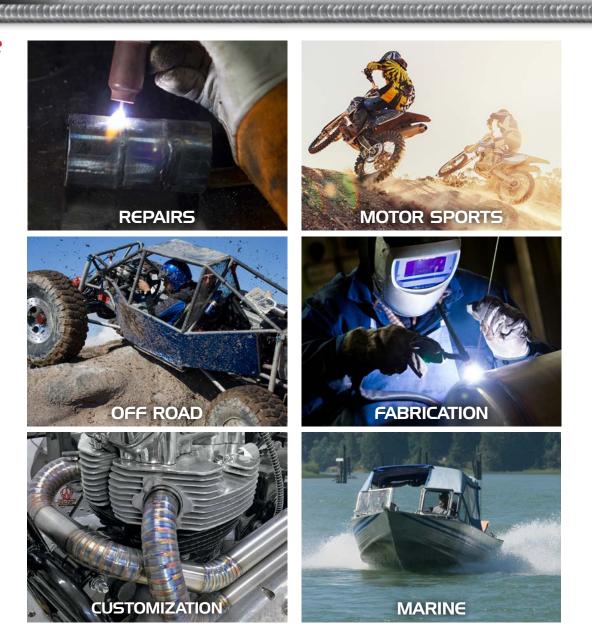





FORM MT200

#### CK WORLDWIDE, INC.

Phone: **1.800.426.0877** Fax: 1.800.327.5038 P.O. Box 1636, Auburn, Washington 98071 USA



