

# Cutmaster® 58

## Medium-duty manual plasma system




The Cutmaster 58 is the most powerful 1/2 in. (12 mm) machine on the market today. This unit cuts through mild, stainless, or aluminum up to 1-1/8 in. (30 mm) thick. The Cutmaster 58 combines power with the well-known performance and features of the industry-leading 1Torch®.

- 6.2 kW rated output, 50% Duty Cycle at 60A with automatic multi-voltage detection from 230-460V; built for portability and durability with the integral multi-handle design
- SL60QD 1Torch quick disconnect with ATC® (Advanced Torch Connector) allowing selective replacement of either the torch handle assembly or the torch leads, using the patented SureLok® technology also available as an RPT Torch
- 1/2 in. (12 mm) recommended cut capacity with greater than 1-1/8 in. (30 mm) maximum cut and 1/2 in. (12 mm) pierce rating
- Industry leading 4-year warranty on power supply and 1-year warranty on torch

Visit [esab.com](http://esab.com) for more information.

### Industry

- Construction
- Fabrication
- Repair and Maintenance

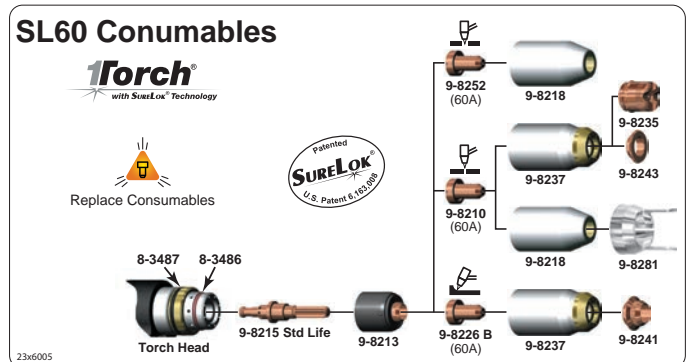

# Cutmaster® 58

Specifications	
Input Voltage	208-230/460 V, 1/3 ph, 50/60 Hz 400 V, 3 ph, 50 Hz 600 V, 3 ph, 50/60 Hz
Recommended Cut	1/2 in. (12 mm)
Maximum Cut	1-1/8 in. (30 mm)
Pierce Rating	1/2 in. (12 mm)
Amperage Output, max.	60 A
Rated Output Power	6.2 kW
Rated Duty Cycle	40% @ 60 A 60% @ 50 A 100% @ 30 A
Amperage Draw	45 A @ 230 V, 1 ph 24 A @ 230 V, 3 ph 16 A @ 460 V, 3 ph
Gas Requirements	Compressed air
Operating Temperature Range	32 – 104° F (0° - 40° C)
SL60QD Torch Duty Cycle	100% at 60 A @ 400 scfh air flow
Torch Air Pressure	75 psi (5.2 bar)
Torch Air Consumption	6.7 cfm (190 l/m)
Dimensions L x W x H	24 x 12 x 15 in. (610 x 305 x 381 mm)
Weight	43 lbs. (19.5 kg)

Ordering Information	
Description	Part Number
Cutmaster 58, 20 ft. (6 m), SL60QD, 208-230 VAC	1-5830-1
Cutmaster 58, 20 ft. (6 m), SL60QD, 460 VAC	1-5830-2
Cutmaster 58, 20 ft. (6 m), SL60QD, 600 VAC	1-5830-5
Cutmaster 58, 50 ft. (15.2 m), SL60QD, 208-230 VAC	1-5831-1
Cutmaster 58, 50 ft. (15.2 m), SL60QD, 460 VAC	1-5831-2
Cutmaster 58, 50 ft. (15.2 m), SL60QD, 600 VAC	1-5831-5
Cutmaster 58 Power Supply, 208-230 VAC	3-5830-1
Cutmaster 58 Power Supply, 460 VAC	3-5830-2
Cutmaster 58 Power Supply, 600 VAC	3-5830-5
Torches	
SL60QD Torch and Lead 20 ft. (6.1 m) 75° Head	7-5604
SL60QD Torch and Lead 50 ft. (15.2 m) 75° Head	7-5605
SL60QD Torch Handle Assembly 75° Head (no leads)	7-5680
SL60QD Lead 20 ft. (6.1 m)	4-5604
SL60QD Lead 50 ft. (15.2 m)	4-5605

*Packages Include: Power supply, torch, spare parts kit, input power, cable, work cable and clamp.*

# Cutmaster® 58

## Wear & Spare Parts 1Torch


Description	Part Number
Electrode	9-8215
Start Cartridge	9-8213
Standoff Guide	9-8281
Shield Cup	9-8218
Shield Cup Max Life	9-8237
Shield Cap Gouging	9-8241
Shield Cap (Drag only)	9-8235
Shield Cap Deflector	9-8243
Tip – Drag (60A)	9-8252
Tip – Standoff (60A)	9-8210
Tip – “A” Gouging, (40 A Max), Profile: Shallow/Narrow	9-8225
Tip – “B” Gouging, (50 – 100 A), Profile: Deep/Narrow	9-8226
Tip – “C” Gouging, (60 – 100 A), Profile: Moderate/Moderate	9-8227
Tip – “D” Gouging, (60 – 120 A), Profile: Shallow/Wide	9-8228

## 1TORCH CONSUMABLES PARTS APPLICATION GUIDE

For SL60® / SL100® Manual Cutting and Gouging Operations.



**DRAG TIP CUTTING** The preferred method of cutting light gauge metal up to 1/4" (6 mm) thickness. Produces the best cut quality narrowest kerf width, fastest cutting speeds, and with little to no distortion. Traditional drag cutting was limited to 40 Amps or less; now with Thermal Dynamics TRUE Cut Drag Tip Series™ technology, it is possible to cut up to 60 Amps. For best results, use the Shield Cup with the torch tip in direct contact with the work (up to 60 Amps).



**DRAG SHIELD CUTTING** This is an operator-friendly method of cutting between 70 to 120 Amps while maintaining a constant standoff distance. For metal thickness greater than 1/4" (6 mm), simply drag the shield cap in contact with the work piece. Use the shield cup body with the appropriate drag shield cap matching the current level being used. This method is not recommended for cutting light-gauge sheet metal.



**STANDOFF CUTTING** The preferred method of cutting metal thicker than 1/4" (6 mm) and at current levels above 60 Amps. Provides maximum visibility and accessibility. Shield cup for 'standoff' cutting (with the torch tip 1/8" (3 mm) to 1/4" (6 mm) from the work piece). Use the shield cup body together with the deflector for extended parts life and improved resistance to reflect heat. This combination provides cutting results similar to the single piece shield cup, as well as easy changeover to gouging or drag shield cutting.



**GOUGING** A simple method of metal removal by angling the torch to a lead angle of 35°-45°, and using a gouging tip. While maintaining a constant standoff distance, this allows for only a partial penetration into the work, thus removing metal from the surface. The amount of current, travel speed, standoff distance, lead angle, and tip size will determine the amount of material removed and the profile of the gouge. You can use the shield cup body with either the gouging shield cap or the shield deflector. Also, you can use the single piece shield cup.

### Gouging Profiles

	Output Range	Depth	Width
<b>Tip A</b> 	40A (MAX)	Shallow	Narrow
<b>Tip B</b> 	50-100A	Deep	Narrow
<b>Tip C</b> 	60-120A	Moderate	Moderate
<b>Tip D</b> 	60-120A	Shallow	Wide
<b>Tip E</b> 	120A	Moderate	Wide

# Cutmaster® 58

## Options & Accessories

Description	Part Number
Cutting Guide Kit (Deluxe)	7-8910
Circle Cutting Guide Kit	7-3291
Filter Wrench	9-9675
Hand Pendant Extension 25 ft. (7.6 m)	7-7744
Lead Extension, 15 ft. (4.6 m)	7-7544
Lead Extension, 25 ft. (7.6 m)	7-7545
Lead Extension, 50 ft. (15.2 m)	7-7552
Leather Lead Covers 20 ft. (6.1 m)	9-1260
Multi-Purpose Cart	7-8888
Radius/Roller Cutting Guide Kit	7-7501
Remote Pendant Control 20 ft. (6.1 m)	7-3460
Single Stage Air Filter Kit	7-7507
Straight Line Cutting Guide	7-8911
Two Stage Air Filter Kit	9-9387
Work Cable #8 with Ground Clamp and 50 mm Plug	9-9692



ESAB / [esab.com](http://esab.com)

